


BEIDE SEITEN SPANNSCHLOSS MIT GABEL, VERPRESST_BOTH SIDES TURNBUCKLE WITH FORK SWAGED

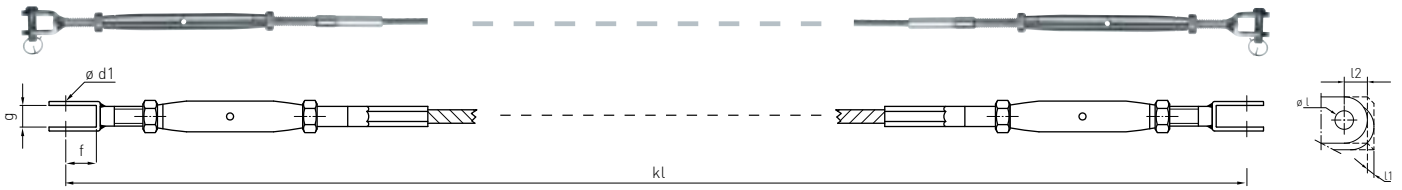

| Artikelnummer Part number | ø Seil ø rope | Sk | Gewinde Thread | Spannweg Adjustment | f | g | ø d1 | kl min | l1 | l2 | ø l | kN |
|---------------------------------|------------------|--------|-------------------|------------------------|----|-----|------|-----------|----|----|------|-----|
| IK 320-0200 dwg | 2 | 7 x 7 | M5 | +52 -86 | 12 | 7,5 | 5 | 345 | 6 | 10 | 5,5 | 2,2 |
| IK 320-0300 dwg | 3 | 7 x 7 | M6 | +56 -100 | 12 | 7,5 | 5 | 390 | 6 | 10 | 5,5 | 5 |
| IK 320-0400 dwg | 4 | 7 x 7 | M6 | +56 -100 | 12 | 7,5 | 5 | 500 | 6 | 10 | 5,5 | 8,9 |
| IK 320-0401 dwg | 4 | 7 x 7 | M8 | +68 -100 | 13 | 10 | 6 | 550 | 8 | 10 | 6,5 | 8,9 |
| IK 320-0500 dwg | 5 | 7 x 7 | M8 | +68 -100 | 13 | 10 | 6 | 560 | 8 | 10 | 6,5 | 14 |
| IK 320-0600 dwg | 6 | 7 x 7 | M10 | +60 -100 | 15 | 11 | 8 | 630 | 9 | 12 | 8,5 | 20 |
| IK 320-0800 dwg | 8 | 7 x 7 | M12 | +92 -140 | 25 | 14 | 12 | 820 | 13 | 20 | 12,5 | 35 |
| IK 320-1000 dwg | 10 | 7 x 19 | M16 | +96 -180 | 32 | 22 | 14 | 1100 | 20 | 23 | 14,5 | 52 |
| IK 320-1200 dwg | 12 | 7 x 19 | M20 | +120 -210 | 42 | 24 | 19 | 1300 | 22 | 30 | 19,5 | 75 |
| IK 320-1600 dwg | 16 | 7 x 19 | M24 | +180 -240 | 42 | 30 | 25 | 1600 | 28 | 46 | 26 | 133 |

kN = Bruchkraft_kN = breaking load