


SCHLAUFEN, VERPRESST, OHNE KAUSCHE_LOOP SWAGED WITHOUT THIMBLE

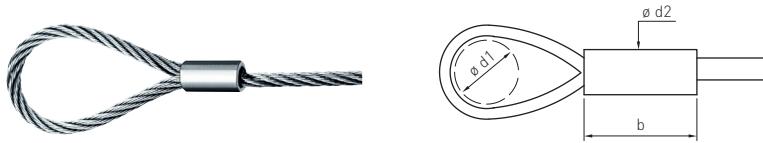

| Artikelnummer Part number | b | ø d1 | ø d2 | ø Seil ø rope | kN |
|------------------------------|----|------|------|------------------|-------|
| 803-0200 | 10 | x* | 4 | 2 | 2 |
| 803-0300 | 13 | x* | 6 | 3 | 4,5 |
| 803-0400 | 16 | x* | 8 | 4 | 8,1 |
| 803-0500 | 20 | x* | 10 | 5 | 12,6 |
| 803-0600 | 28 | x* | 13 | 6 | 18,1 |
| 803-0800 | 40 | x* | 16 | 8 | 32,2 |
| 803-1000 | 50 | x* | 20 | 10 | 46,9 |
| 803-1200 | 60 | x* | 24 | 12 | 67,6 |
| 803-1400 | 70 | x* | 28 | 14 | 91,8 |
| 803-1600 | 80 | x* | 32 | 16 | 119,7 |

Presshülse | Werkstoff 1.4404 | *Maß ø d1 variabel. Nicht geeignet für Spiralseile | kN = Bruchkraft

Ferrule | Material 1.4404 | *Dimension ø d1 variable. Not suitable for strands | kN = breaking load

ALLE ANGABEN IN MILLIMETERN_ALL DIMENSIONS IN MILLIMETRES