


ÖSE, VERPRESST_EYE, SWAGED

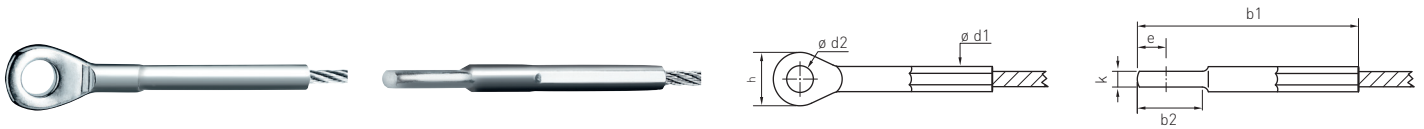

| Artikelnummer Part number | b1 | b2 | e | h | k | ø d1 | ø d2 | ø Seil ø rope | kN |
|------------------------------|-----|----|------|------|----|------|------|------------------|------|
| 880-0200 dwg | 57 | 16 | 6,5 | 12,5 | 3 | 5,5 | 5,5 | 2 | 2,9 |
| 880-0300 dwg | 62 | 17 | 6,5 | 13,5 | 4 | 6,3 | 6,5 | 3 | 6,7 |
| 880-0400 dwg | 77 | 22 | 9 | 17 | 5 | 7,5 | 8,5 | 4 | 11,9 |
| 880-0500 | 87 | 27 | 11 | 21 | 6 | 9 | 10,5 | 5 | 18,5 |
| 880-0600 dwg | 108 | 29 | 12,5 | 25 | 8 | 12,5 | 13 | 6 | 26,7 |
| 880-0800 dwg | 133 | 37 | 15 | 30 | 10 | 16 | 14,5 | 8 | 44,5 |
| 880-1000 dwg | 159 | 45 | 18 | 35 | 11 | 17,8 | 16,3 | 10 | 69,5 |
| 880-1200 dwg | 181 | 49 | 20 | 40 | 15 | 20 | 19,3 | 12 | 93,6 |
| 880-1600 dwg | 245 | 72 | 31,7 | 44 | 24 | 28,2 | 25,5 | 16 | 133 |

Werkstoff 1.4401 | kN = Bruchkraft_Material AISI 316 | kN = breaking load

ALLE ANGABEN IN MILLIMETERN_ALL DIMENSIONS IN MILLIMETRES

